epcom®


Product parameter list

A1.Model No	EP790J	**A2.Release Date**	
A3.Product Name	7 inch digital LCD monitor	**A4.Product Category**	Monitors
A5.Applicable models			

Product Image



Product Dimensions

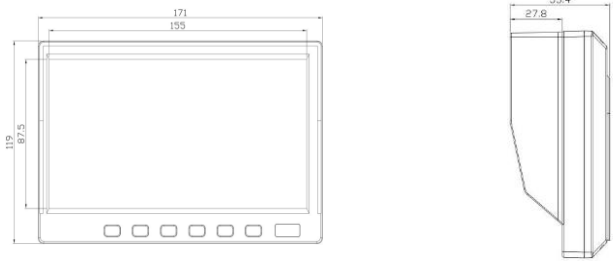

B1.Product Features

1. Multi-languages of display available:English, Dutch, French, Portuguese, Spanish, Italian, Swedish, German, Chinese
2. With remote control function
3. The monitor has speakers that can adjust the sound from the control panel or remote control
4. Supports video input from two cameras at the same time
5. Support audio input from one camera at a time (optional)
6. Images can be flipped up and down from left to right
7. The second camera has a trigger control line and automatically switches when triggered
8. In standby mode, it will start up automatically when triggered and switch to the corresponding camera image
9. The working power supply range is 12~24V, with short circuit protection function of power supply

B2.Specifications

Screen Size	7"/16：9
Resolution	800（W）* R.G.B * 480(H)
TV System	PAL/NTSC/AUTO
Brightness	300cd/㎡
Contrast	500:1
Active Area	154.08(W) × 85.92(H) mm
Viewing Angle	U/D:50°/70°,R/L:70°/70°
Image Settings	Brightness、Color、Contrast
Video Format	CVBS
Mirror Flip	Non-mirror, mirror, flip, mirror flip
Video Channel	Two channel video input
Reverse Function	Single way back (ruler setting function)
Reversing Delayed	0-15s
Scale Function	Two scale ruler and automatic ruler switch
Power Supply	12/24V，DC/<9W
Operating Temperature	-10℃ to +65℃
Storage Temperature	-25℃ to +70℃

C1.Accessories	1.monitor 2.monitor bracket 3.JenaLabs 4.Remote control 5.Screw package 6.Manual

D1.Packing Information

Product N.W.	1800g	Carton N.W.	21.2kg
Product G.W.	2116g	Carton G.W.	21.8kg
Inner Box Dimension	27*19.7*7.3cm	Qty Per Carton	10PCS
Carton Dimension	39*28.5*42cm	Loading Qty / 20' FCL	5700 PCS

E1.Warranty Terms	1 year of warranty	**F1.Certificates**	
G1.Remarks			

epcom®


Product parameter list

A1.Model No	EP790J	**A2.Release Date**	
A3.Product Name	Color 1/4 CMOS Camera	**A4.Product Category**	Waterproof Camera
A5.Applicable models	\		

Product Image



Product Dimensions

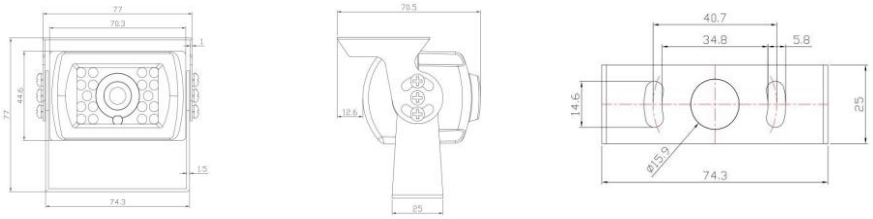

B1.Product Features

2. Waterproof grade IP69K
3. Support mirror switching
4. With night vision function, infrared distance is 13m
5. Can be mounted on rear of vehicles

B2.Specifications

Image Device	1/4 CMOS
TV System	NTSC/PAL
Effective Pixels	648(H)*488(V)
Sensing Area	3.63mm*2.73mm
Sync. System	Internal
Resolution	480 TVL
Minimum Illumination	0.1 Lux (day), 0 Lux (with IR)
Microphone	Optional
IR LED Qty	18PCS
Video Output	1.0 Vp-p/75 Ohm
Scanning System	interlace
AGC	AUTO
Signal to noise ratio	Better than 48dB
White balance	AUTO
Gamma Consumption	0.45
Electronic Shutter	AUTO
Backlight Compensation	AUTO
Power Supply	DC12V
Lens	2.5mm
Lens Angle	108°
Current Drain	65±5mA
Operating Temperature	-20℃-70℃,RH 95% MAX
Storage Temperature	-30℃-80℃,RH 95% MAX

C1.Accessories	1.Screw package 2..Manual

D1.Packing Information

Product N.W.	306g	Carton N.W.	17.1kg
Product G.W.	342g	Carton G.W.	17.8kg
Inner Box Dimension	10.4*8.5*8cm	Qty Per Carton	50 PCS
Carton Dimension	42*31*34cm	Loading Qty / 20' FCL	30000 PCS

E1.Warranty Terms	1 year of warranty	**F1.Certificates**	CE
G1.Remarks			