
CyberPower®

# CR6U61001
## Wall Mount Enclosure

| | | | | |
|---|---|---|---|---|
| Adjustable Mounting Depth | Hexagonal Perforation for Ventilation | Removable Doors and Side Panels | Rack U Numbering | Flexible Enclosure Configuration |
| Reversible Front Door | Square and Threaded Mounting Hole | Keyed-alike Door and Side Panels | Easy Cable Access Top and Bottom | Integrated Grounding Points |

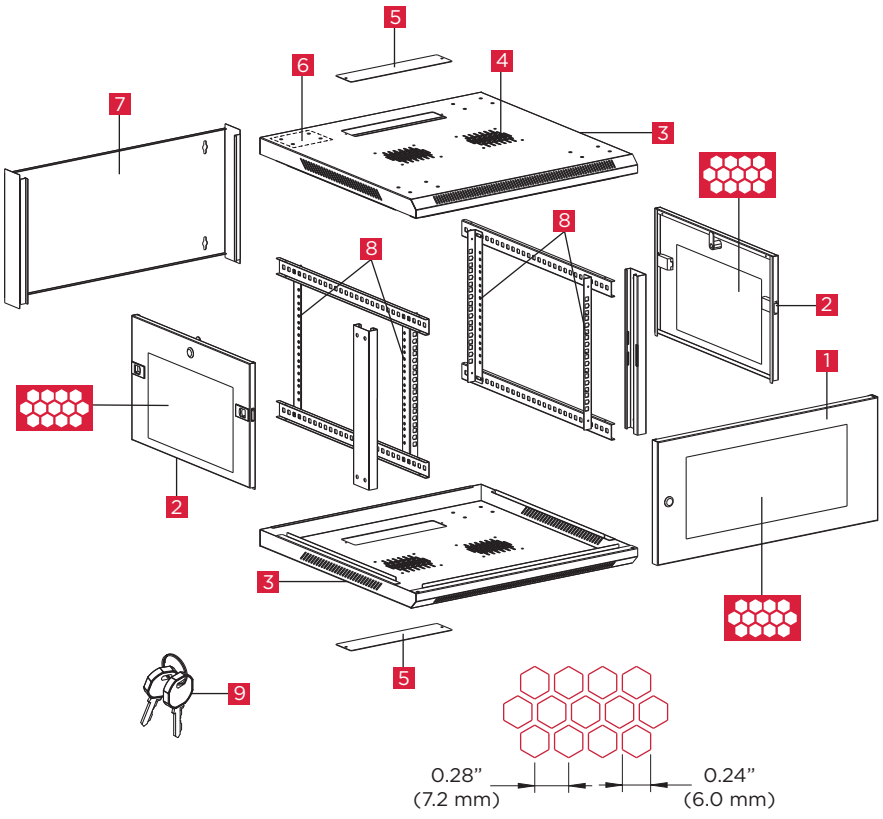


1. Removable, Reversible, and Lockable Front Door
2. Removable and Lockable Side Panels (2)
3. Top/Bottom Covers
4. Vents for Optional Fan Kit (4)
5. Cable Access with Removable Covers (2)
6. Reserved Holes for Optional Caster Kit
7. Back Panel
8. Depth-adjustable Rack Angles with Dual Mounting Holes (4)
9. Keys (2)

Hardware and Accessories

| | | |
|---|---|---|
| User's Manual | Expansion Bolt (4) | #12-24 Screw, Silver (30) |
| M6 Phillips-Head Screw, Black (30) | M6 Cage Nut (30) | Cup Washer (30) |

## Specifications


| Model | CR6U61001 |
|---|---|
| Rack Height | 6U |
| Max. Mounting Depth | 22.2 in. (562 mm) |
| Weight Capacity-Stationary | 132.3 lbs. (60 kg) |
| Unit Dimensions (WxHxD) | 23.6 x 14.6 x 23.6 in. (600 x 372 x 600 mm) |
| Shipping Dimensions (WxHxD) | 26.2 x 17.1 x 26.2 in. (665 x 435 x 665 mm) |
| Unit Weight | 37.2 lbs. (16.9 kg) |
| Shipping Weight | 41.0 lbs. (18.6 kg) |
| Approvals | DIN41491, DIN41494, EIA/ECA-310-E, IEC 60297-3-100, RoHS |

#All specifications are subject to change without notice.


- Ships fully assembled.
- Versatile, space-efficient wall mount equipment protection maximizes floor space.
- Hexagonally perforated front door and side panels provide optimal ventilation.
- Reversible front door allows opening from left or right to meet different installation requirements.
- Vertical adjustable rack angles can be adjusted in 3/4" increments for mounting depth requirements up to 22".

Hexagonal holes, compared with round holes, allow more efficient airflow and therefore optimize ventilation.


Optional caster kit (including 4 casters) is available for mobility, allowing you to easily move and adjust the position of your rack products.

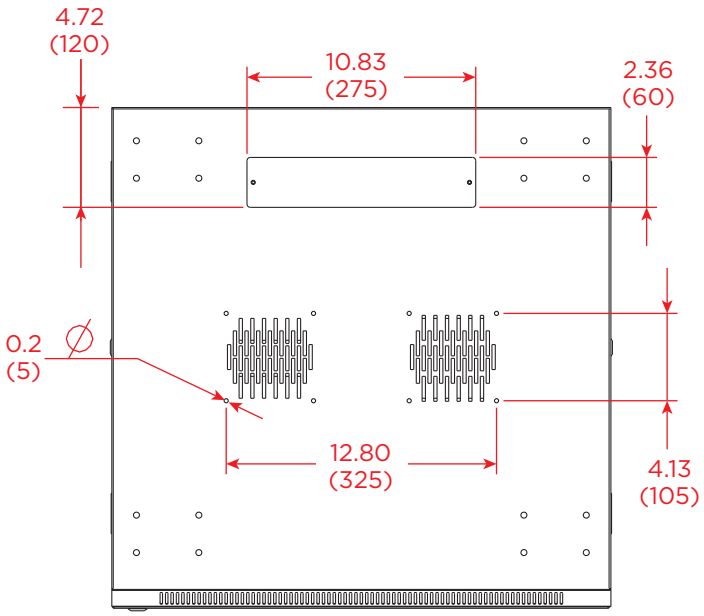



TOP/BOTTOM VIEW

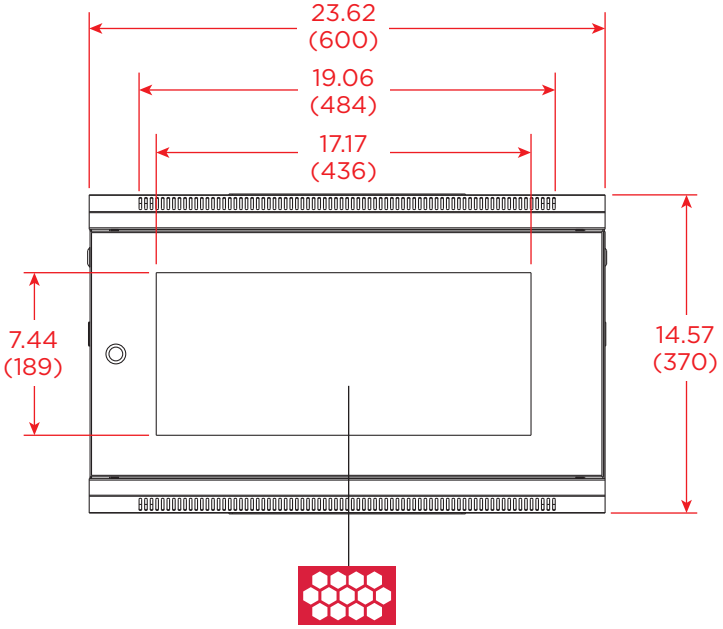


FRONT VIEW

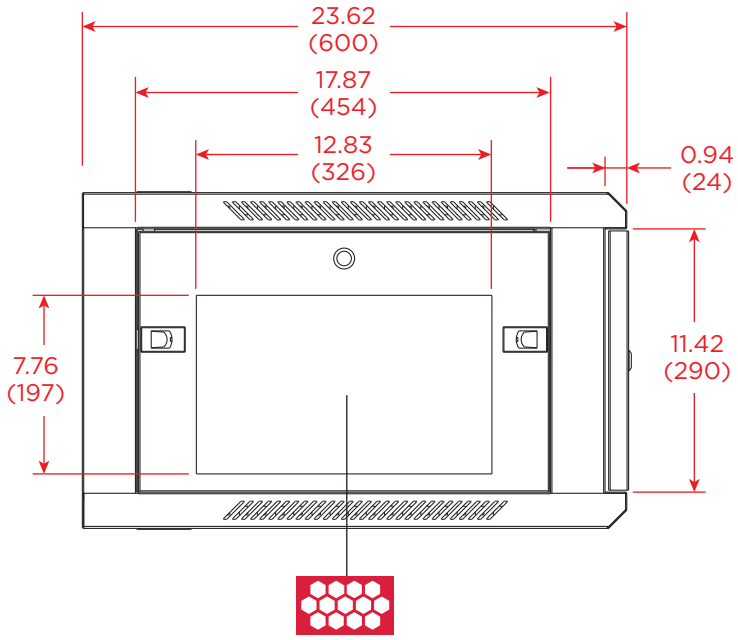



SIDE VIEW

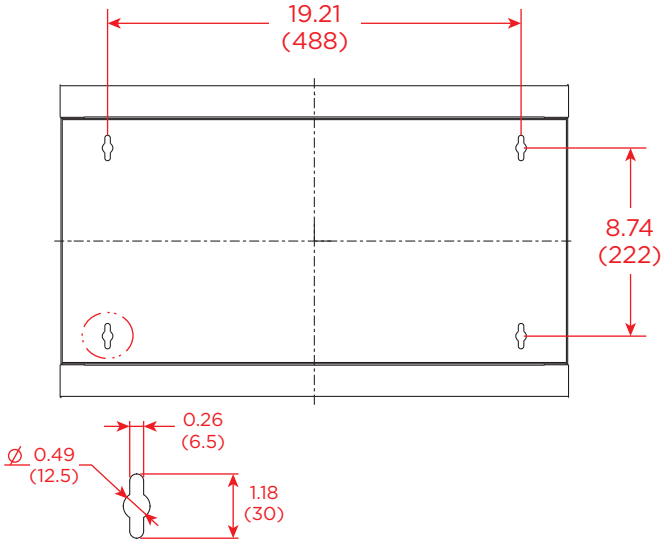



REAR VIEW

Dimensions: INCHES (mm)

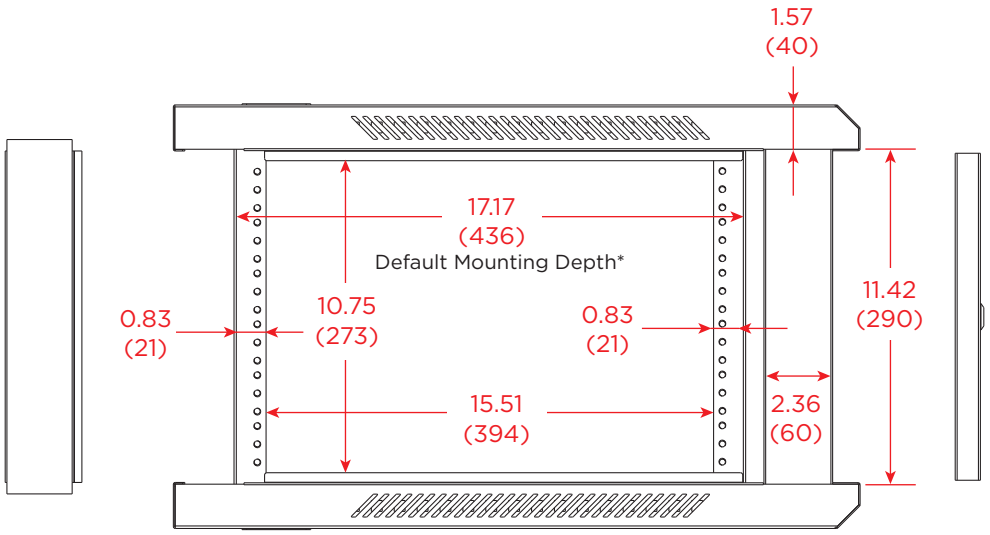


*Adjustable Mounting Depth: 1.9" - 22.2" (47 - 562 mm)

SIDE VIEW W/O PANEL

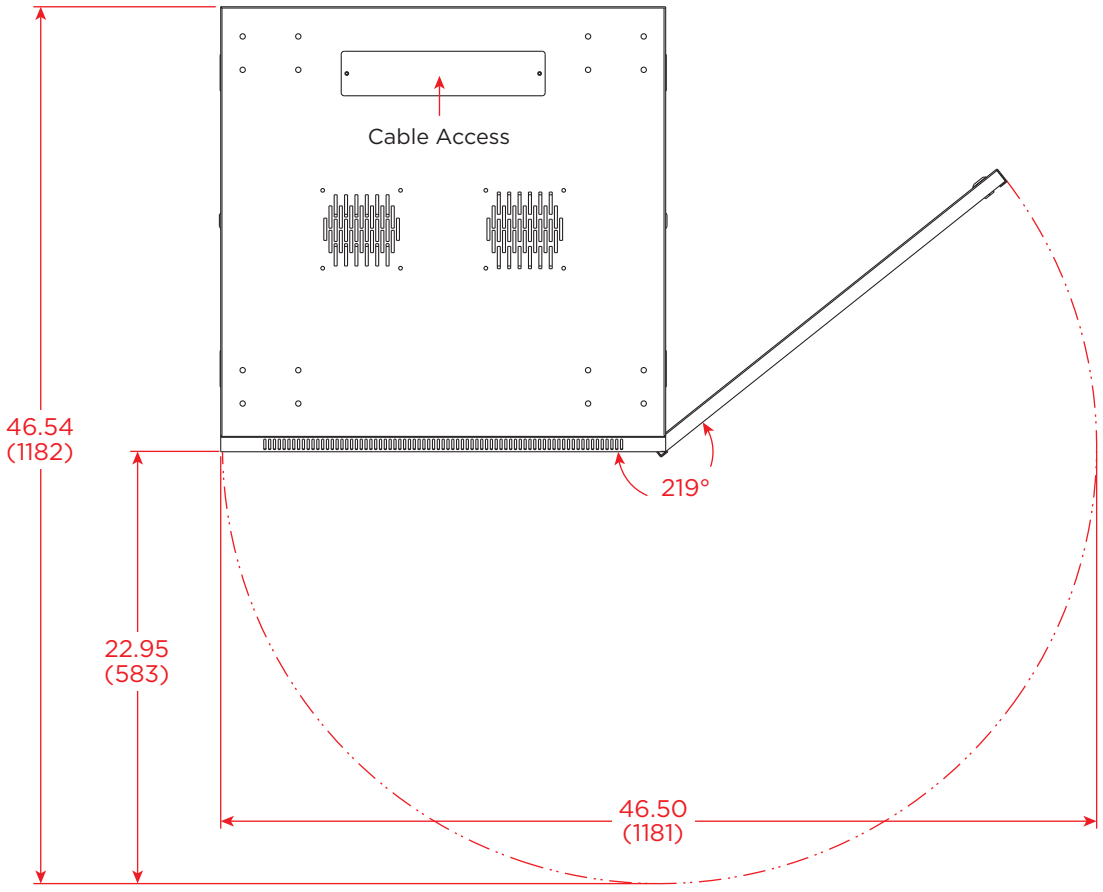


FRONT OPENING

Dimensions: INCHES (mm)

CyberPower®

**Cyber Power Systems, Inc.**

www.cyberpower.com

**USA and Canada:**
4241 12th Ave East, Suite 400
Shakopee, MN 55379
Toll-free: (877) 297-6937

**All other regions:**
Please visit our website for local contact information.

Copyright © 2017 Cyber Power Systems, Inc. All rights reserved.