
Motor Driven Electric Hook Lock for Sliding Door

Parameters


Electric Strike Size	250Lx30Wx48H(mm)
Dimensions of Strike Plate	170Lx30Wx3H(mm)
Voltage	12~28VDC
Current	≤500mA
Signal Output	Door Status Signal Output(NO/COM);Lock Signal(NO/NC/COM)
Time Delay	0/3/6/9sec
LED	Red shows locked ;Green shows unlocked
Detection Distance	8mm
Suitable for	metal door, glass door
Material	304 stainless steel, wire draw finishing
Weight	1.0kg


Dimension

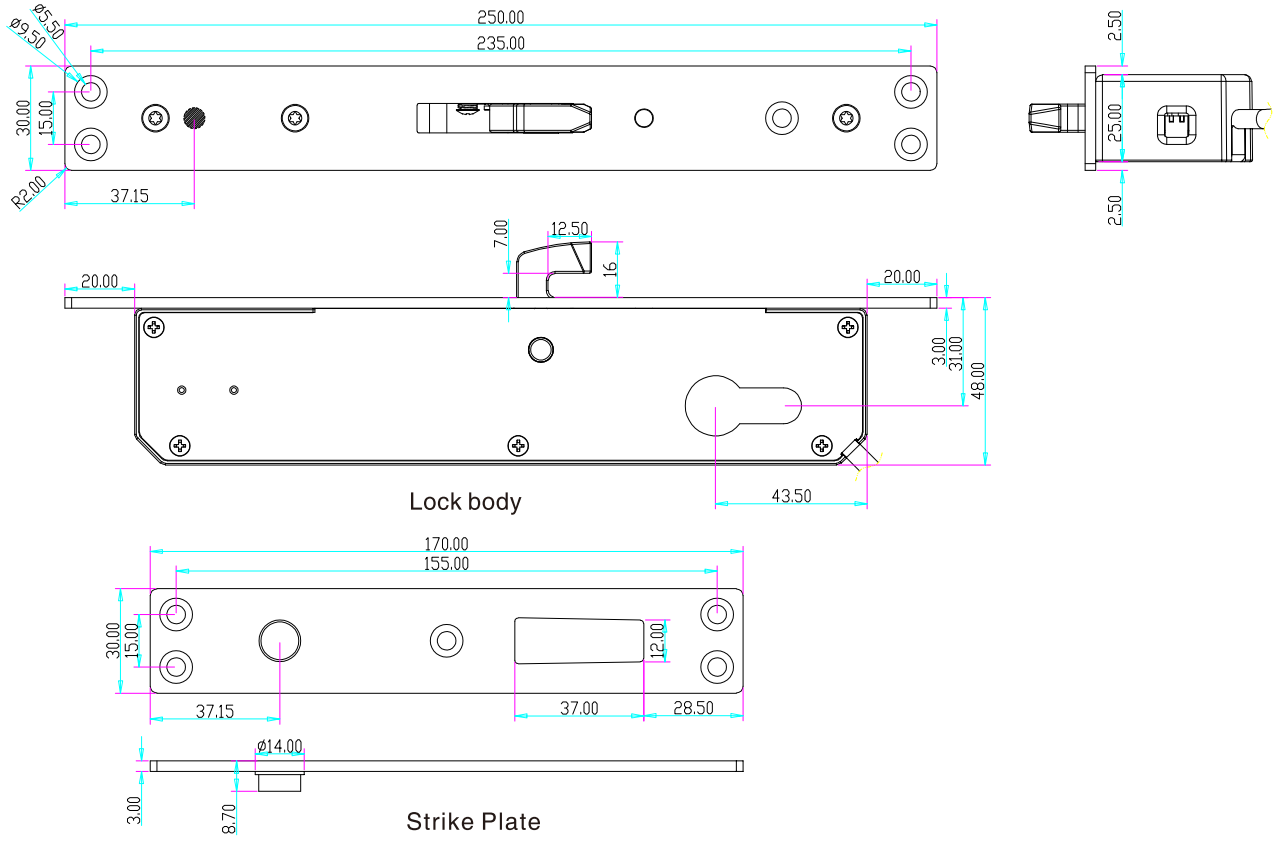


Wiring Diagram


Adjust the delay time for locking auto maticly
0/3/6/9 secs.

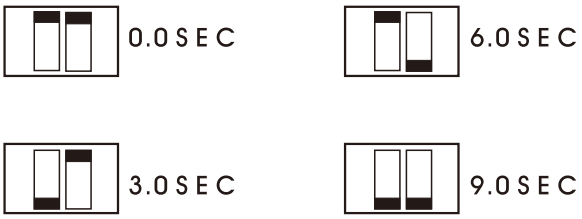

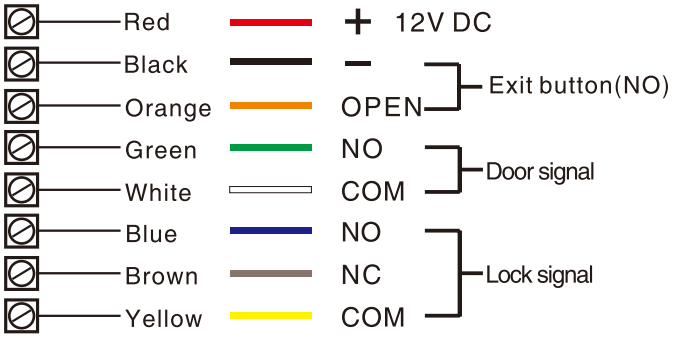

Installation

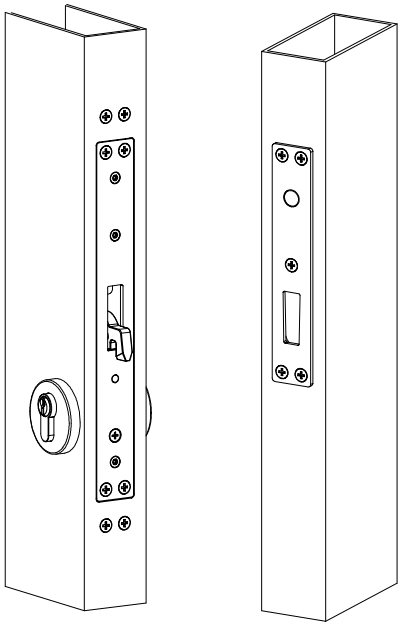

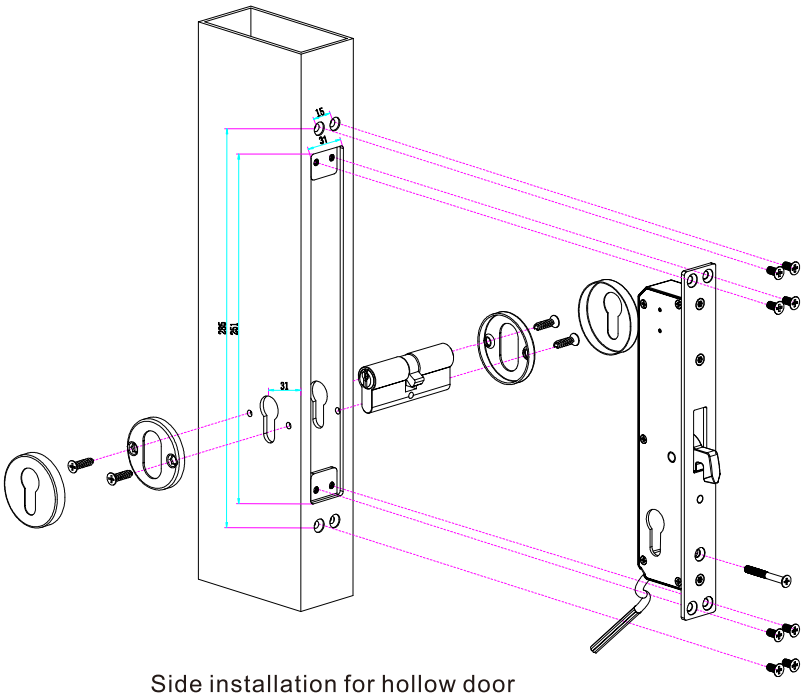

Side installation for hollow door

Installation Schematic

