DS-D4626CE-1AS/M

DS-D4626CE-1AS/M




- Indoor P1.9/2.6/2.9 products can provide flexible version
- Can be connected vertically with the general panels of Aries & Aries Pro series indoor of 500*500mm
- Seamlessly from -22.5° convex to +22.5° concave in 2.5° increments, offering 18 angles to match any creative vision
- 8 panels can be assembled into a cylinder (The minimum diameter of the cylinder is 1.27m)

▪ Specification

Product Type	
Product Type	Spare Modules Package
Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P2.6
Pixel Pitch	2.6042 mm
Resolution	96x96
Pixel Density	147456 dots/m²
Lamp Board Housing	With housing
Maintenance Method	Rear maintenance
Display	
White Balance Brightness	1000 cd/㎡
Color Temperature	6500K adjustable
Viewing Angle	Horizontal 160°, vertical 140°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.004Cx , Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Frame Frequency	50/60 Hz
Refresh Rate	7680 Hz
Grey Level	14 bit
Key Material	
Lamp Encapsulation	SMD1515
Control System	Hikvision
Working Environment	
Working Temperature	-20 ℃ to +45 ℃ (-4 ℉ to +113 ℉)
Working Humidity	10%~90%RH (No condensation)
Storage Humidity	10%~90%RH (No condensation)
Storage Temperature	-40 ℃ to +60 ℃ (-40 ℉ to +140 ℉)

▪ Dimension

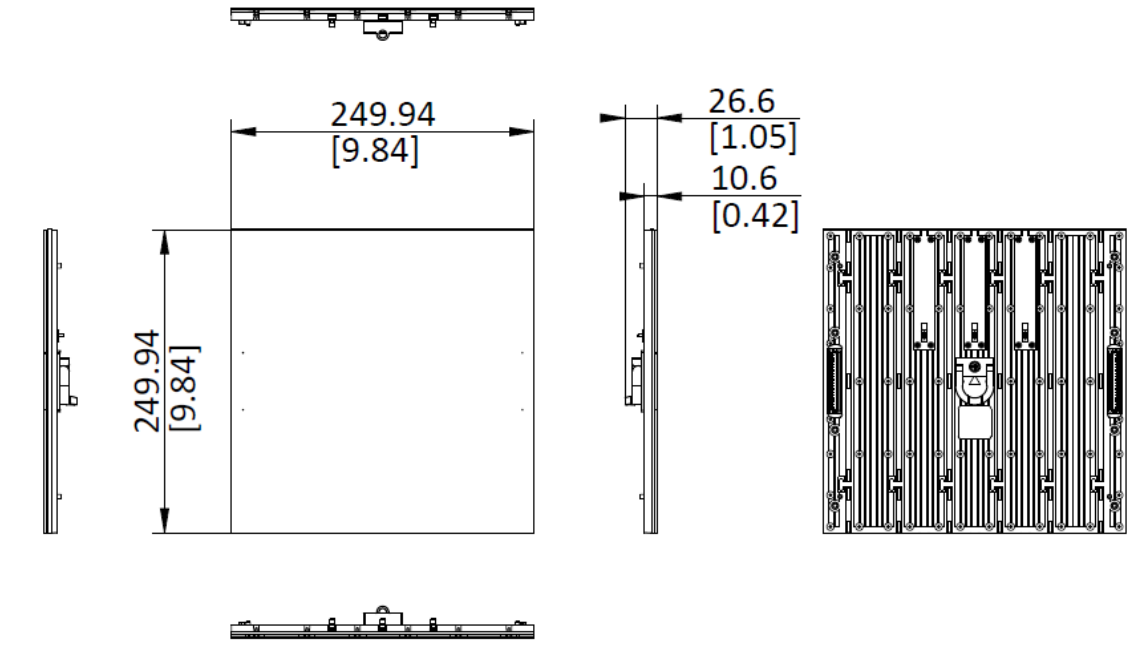

Unit: mm [inch]

SCALE	1:1

▪ Accessory



DS-D4626CD-1A



DS-D4626CE22-1AS



DS-D4626CD-1AC

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®