Milesight

NDAA

AI IR Mini Dome Network Camera



AI · H.265+ HEVC · Starlight · Super WDR · Motion Detection · Privacy Masking · 3-Axis · Mic · SD XC · PoE · GMST ONVIF


DATASHEET

KEY FEATURES

- NDAA Compliance (The fully NDAA-compliant products are well suited for government, defense and a range of projects subject to the NDAA.)
- 0.005Lux Starlight (Deliver high detailed color images even in low light environment reaching 0.005Lux.)
- Advanced Functions (Boasting to support various advanced functions such as HLC, Defog, ROI.)
- Built-in Microphone (Supporting audio function to hear what is happening in front of the camera.)
- SIP (Session Initiation Protocol. Providing audio/alarm/intercom and video streaming for mobile phones and video phones.)
- 3-Axis Mechanical Design (Featuring 3-axis mechanical design for fast and easy adjustment of the camera's viewing angle.)
- 1TB (Supporting ultra-large external microSD/SDHC/SDXC card storage up to 1TB.)
- Smart Stream (Bandwidth, storage and bit rate save with Smart Stream ON, eg, H.265+ saves 70%~80% bandwidth of H.264.)

AI Video Analytics

The AI Camera Series can intelligently filter objects to focus on human and vehicle detection in multiple events such as Region Entrance, Region Exiting, Loitering, Advanced Motion Detection, etc.

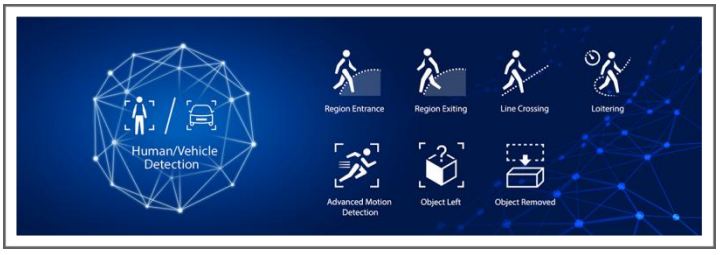

120dB Super WDR

Sensor-based WDR technology allows the camera to record greater scene details with true color reproduction even under the extreme back light and high contrast conditions. The ratio that the brightest light signal values divided by the darkest light signal values is up to 120dB.




4K Video Viewing Experience

The camera performs well in catching detailed image with 4K HD resolution regardless of the moving speed.



Easy Installation & Adjustment

With a built-in RJ45 port, PoE functionality and 3-axis mechanical design, the installation steps of IR Mini Dome Camera are as easy as ABC.

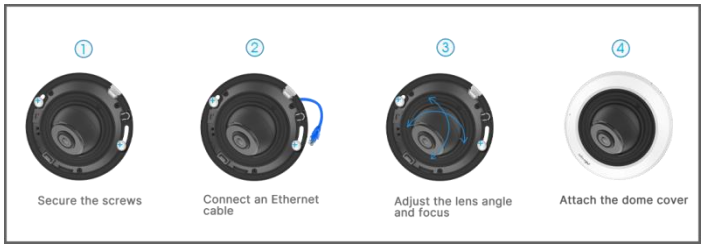

AI IR Mini Dome Network Camera



	Model	MS-C5383-PD (5MP)
Camera	Image Sensor	1/2.8" Progressive Scan CMOS
	Min. Illumination	Color: 0.008Lux@F1.6, B/W: 0Lux with IR on
	WDR	120dB Super WDR
	Lens	4mm@F1.6
	Mount	M12
	Field of View	H86°/D108°/V63°(4mm)
	Shutter Time	1/100000s~1s
	IR Distance	Up to 20m
	Day/Night Mode	Day/Night/Auto/Customize/Schedule
	S/N	>55dB
Video	Max.Image Resolution	2592x1944
	Primary Stream	60Hz: 30fps@(2592x1944, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x576) 50Hz: 25fps@(2592x1944, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x576)
	Secondary Stream	60Hz: 30fps@(704x576, 640x480, 640x360, 352x288) 50Hz: 25fps@(704x576, 640x480, 640x360, 352x288)
	Tertiary Stream	60Hz: 30fps@(1280x720, 704x576, 640x480, 640x360, 352x288) 50Hz: 25fps@(1280x720, 704x576, 640x480, 640x360, 352x288)
	Video Compression	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG
	Video Bit Rate	16Kbps~16Mbps (CBR/VBR Adjustable)
Image	Privacy Masking	Up to 4 Areas
	ROI	Up to 8 Areas
	Image Setting	Brightness/Contrast/Saturation/Sharpness
	Image Enhancement	BLC, HLC, 2D DNR, 3D DNR, Defog, AWB, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur
Interface	Ethernet	1*RJ45 10M/100M Ethernet Port
Network	Network Storage	NAS (Support NFS, SMB/CIFS), ANR
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL, TLS 1.2
Audio	Audio Compression	G.711/AAC/G.722/G.726
	Audio Sampling Rate	8/16/32/48KHz
	Audio Bit Rate	16~256kbps
	Built-in Microphone	Support


AI IR Mini Dome Network Camera





Intelligent Analytics	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Line Crossing, Loitering, Object Left, Object Removed
	People Counting & Report	Count the number of people entering or exiting
Event	Basic Event	Motion Detection, Tamper Detection, Audio Alarm
	Exception	Network Disconnection, IP Address Filtering, Record Failed, SD Card Full, SD Card Uninitialized, SD Card Error, No SD Card
	Event Action	FTP Upload Record, SMTP Upload Record, SD Card Record, Snapshot, SIP Phone, HTTP Notification
System	Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 1TB
	SIP/VoIP Support	Yes, Voice & Video-over-IP
	System Compatibility	ONVIF Profile G & S & T & M, API
General	Working Temperature	-40℃~60℃
	Working Humidity	0~90% (Non-condensing)
	Power Supply	PoE (802.3af)
	Power Consumption	3.3W MAX 5W MAX (With IR on)
	Weight	Approx. 200g
	Dimensions	Φ97.8mmX57.9mm
	Warranty	3 Years/5 Years (Optional)





Structure Diagrams

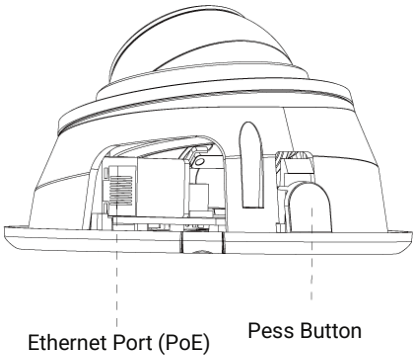

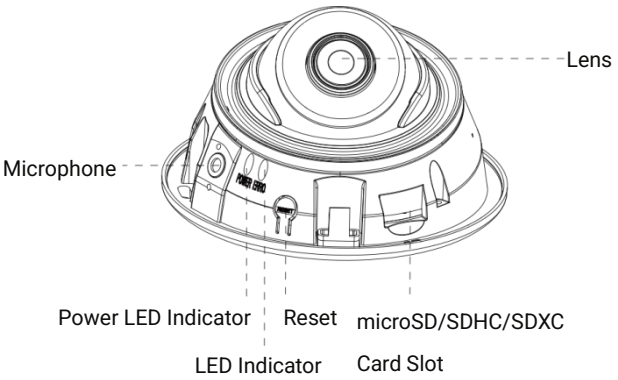

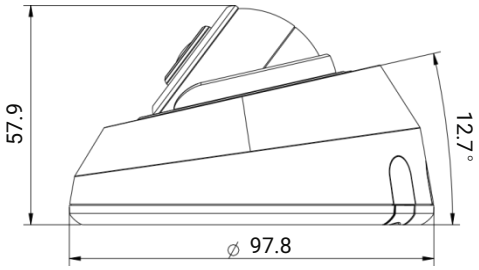

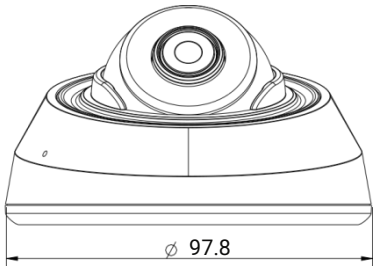


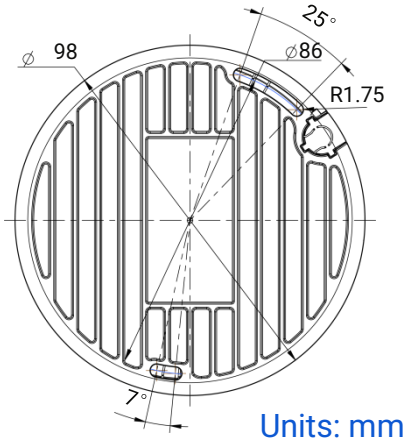

Units: mm

Accessories Support






A71 Wall Mount



A03 External Corner Bracket



A82 Recessed Mount



A01 V3 Pole Mount