
DESCRIPTION	NEMA BOX GRAY BODY & GRAY COVER	
MATERIAL	FLAMMABILITY RATING	CONTINUOUS OPERATING TEMP.
PBT / PC BLEND	UL94-5VA + UV (f1)	-40 ~ 75 °C / -40 ~ 167 °F
CLEAR PC	UL94-VO UV STABLILIZED	-40 ~ 130 °C / -40 ~ 266 °F

txPRO Professional Radio Accessories


PART NUMBER	TXT-2535	REVISION DATE	8 / 23 / 2011

FINISH:
BODY _____ LIGHT GRAY
COVER _____ CLEAR
LATCHES & HINGES _____ PLASTIC
WALL MOUNTING BRACKETS__ STAINLESS STEEL

BODY

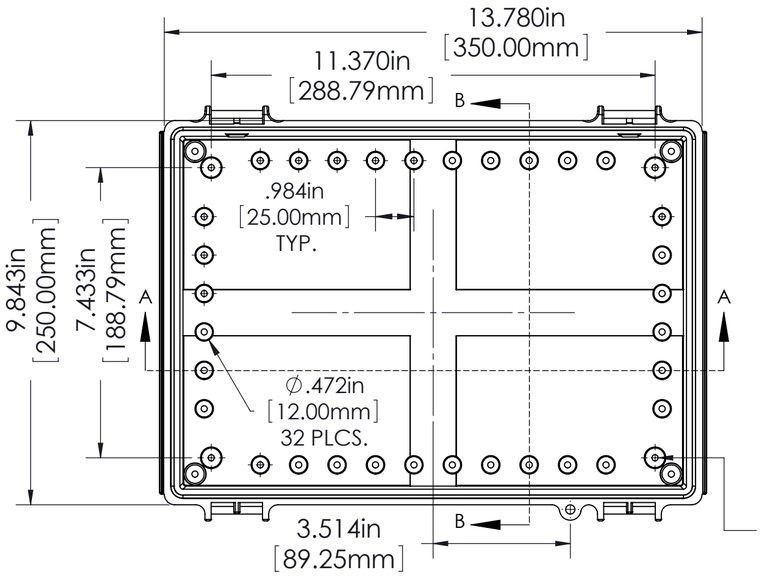



∅.157in
[4.00mm]
M5 THREADED
INSERTS ON ALL
OTHER VERSIONS
USE M5 X 8 mm LG.
MACHINE SCREWS.

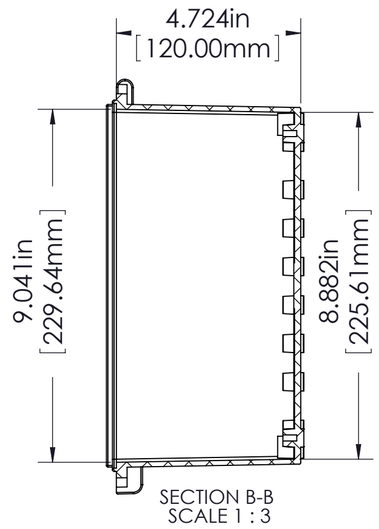


SECTION B-B
SCALE 1 : 3

COVER

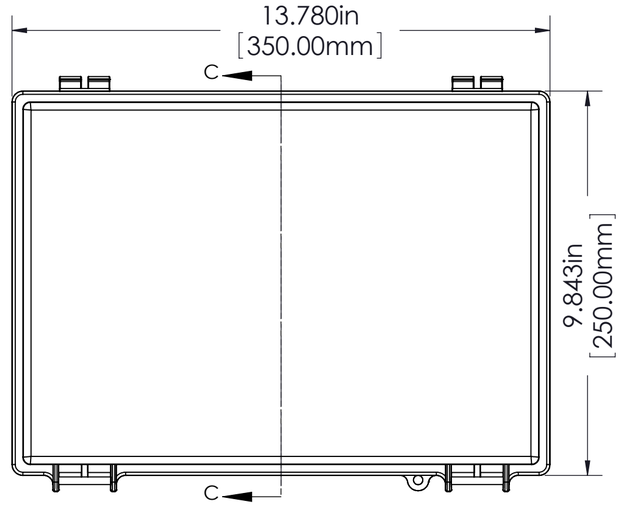


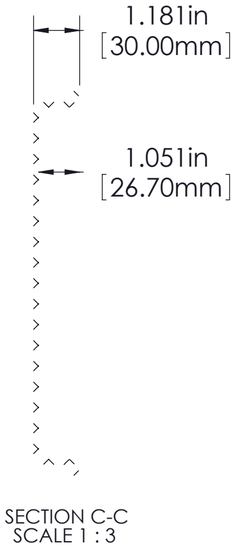


SECTION C-C
SCALE 1 : 3

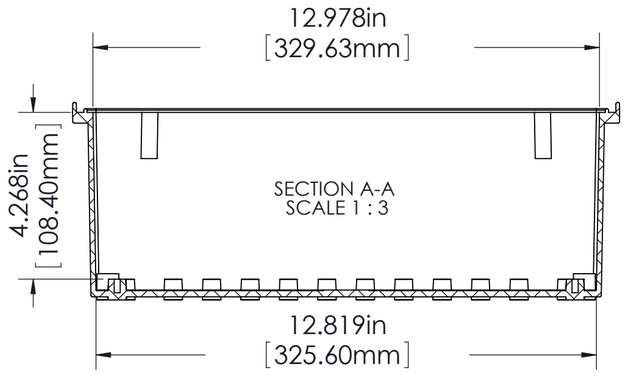


ASSEMBLY

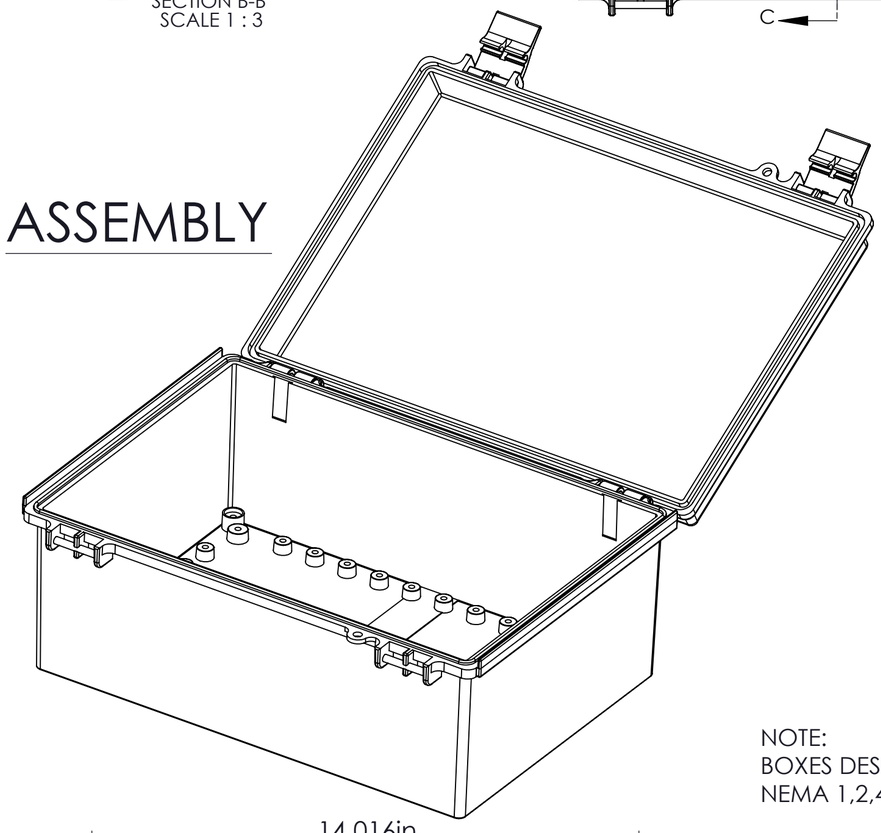

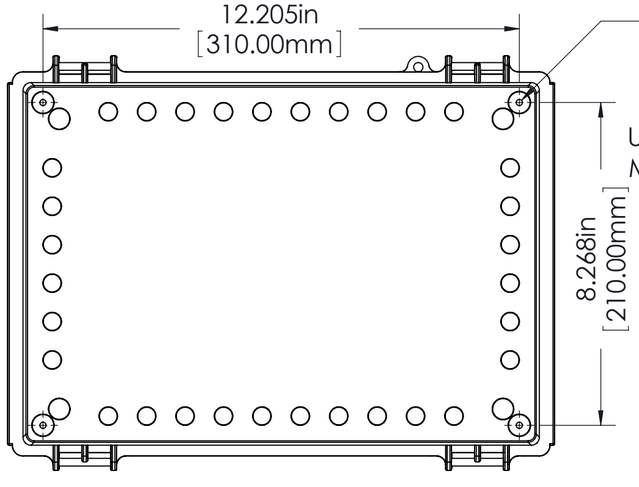

∅.157in
[4.00mm]
M5 THREADED
INSERTS ON ALL
OTHER VERSIONS
USE M5 X 8 mm LG.
MACHINE SCREWS.

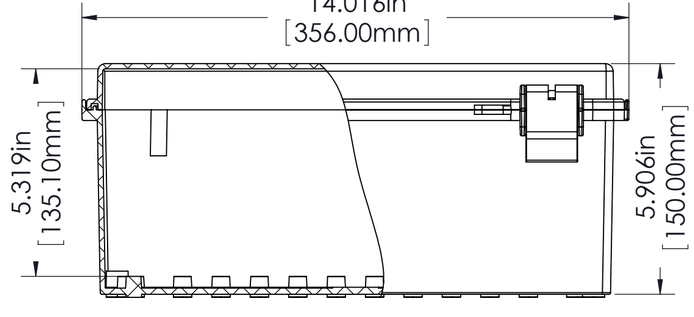

NOTE:
BOXES DESIGNED TO MEET FOLLOWING STANDARDS:
NEMA 1,2,4,4X AND IEC529-IP67 REQUIREMENTS.

TOLERANCE:
ALL DIMENSIONS HAVE ±0.039 in (±1mm)
TOLERANCE UNLESS OTHERWISE SPECIFIED.

PART NUMBER	MATERIAL		USE
	BODY	COVER	
TXT-2535	PBT / PC	CLEAR PC	OUTDOOR