9.7 - UNICANAL ACERO GALVANIZADO. SERIE US-UP-PC
CON RECUBRIMIENTO EXTERIOR DE PVC.


9.7 - UNICHANNEL GALVANIZED STEEL. US-UP-PC SERIES
PVC COATING.

FICHA TECNICA / TECHNICAL DATA

007 - RW - 349

- A prueba de ambientes corrosivos.
- Recubrimiento PVC: 40 mils mínimo.
- Pruebas de cámara salina de acuerdo a ASTM B117
- Pruebas de adherencia de acuerdo a ASTM 3359
- Resistencia a impactos mecánicos en cuerpo de acuerdo a IK09,gracias a su diseño que no cuenta con elementos suceptibles a rompimiento.
- Lámina acero galvanizada CAL. 12
- Aplicaciones: Son utilizados para crear soporteria junto con las abrazaderas unicanal para tuberia conduit.
- Fabricado en base a: UL 5B
  NEMA RN-1

- For use in corrosive enviroments.
- PVC coating: 40 mils minimum.
- Saline chamber test according to ASTM B117
- Paint adhesion test according to ASTM 3359
- Resistance to mechanicals impacts to body according IK09, thanks to its design that does not have elements suceptible to breakage.
- Galvanized Steel CAL. 12
- Applications: Are used to create support systems with unichannel straps for conduit pipes.
- Manufactured in compliance with:
  UL 5B
  NEMA RN-1

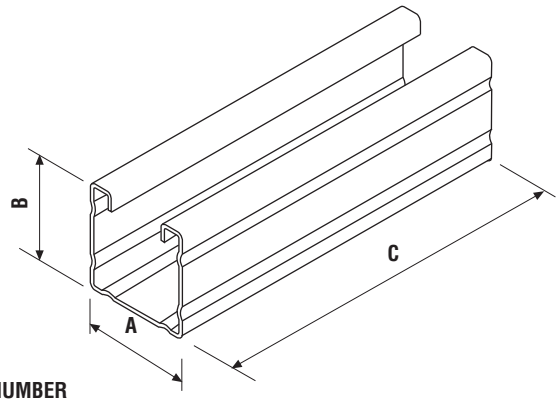

USAR No. DE CODIGO PARA HACER PEDIDOS / TO ORDER USE CODE NUMBER

Catalogo / Catalog	Codigo / Code	Modelo / Model	A		B		C		Peso x 100 / Weight x 100		Unit. Ctn. Pzas. Pcs.	Std. Pkg. Pzas. Pcs.
			mm	inch	mm	inch	mm	inch	kg	Lb		
US-422-PC	12.44.3973.PC	Solido / Solid	43.3	1.70	22.6	0.88	200	7.87				
UP-422-PC	12.44.3974.PC	Perforado / Slotted	43.3	1.70	22.6	0.88	200	7.87				
US-442-PC	12.44.3975.PC	Solido / Solid	43.3	1.70	43.3	1.70	200	7.87				
UP-442-PC	12.44.3976.PC	Perforado / Slotted	43.3	1.70	43.3	1.70	200	7.87				
US-423-PC	12.44.3977.PC	Solido / Solid	43.3	1.70	22.6	0.88	305	12				
UP-423-PC	12.44.3978.PC	Perforado / Slotted	43.3	1.70	22.6	0.88	305	12				
US-443-PC	12.44.3979.PC	Solido / Solid	43.3	1.70	43.3	1.70	305	12				
UP-443-PC	12.44.3980.PC	Perforado / Slotted	43.3	1.70	43.3	1.70	305	12				
US-424-PC	12.44.3981.PC	Solido / Solid	43.3	1.70	22.6	0.88	457	18				
UP-424-PC	12.44.3982.PC	Perforado / Slotted	43.3	1.70	22.6	0.88	457	18				
US-444-PC	12.44.3983.PC	Solido / Solid	43.3	1.70	43.3	1.70	457	18				
UP-444-PC	12.44.3984.PC	Perforado / Slotted	43.3	1.70	43.3	1.70	457	18				
US-426-PC	12.44.3985.PC	Solido / Solid	43.3	1.70	22.6	0.88	610	24				
UP-426-PC	12.44.3986.PC	Perforado / Slotted	43.3	1.70	22.6	0.88	610	24				
US-446-PC	12.44.3987.PC	Solido / Solid	43.3	1.70	43.3	1.70	610	24				
UP-446-PC	12.44.3988.PC	Perforado / Slotted	43.3	1.70	43.3	1.70	610	24				
US-427-PC	12.44.3989.PC	Solido / Solid	43.3	1.70	22.6	0.88	762	30				
UP-427-PC	12.44.3990.PC	Perforado / Slotted	43.3	1.70	22.6	0.88	762	30				
US-447-PC	12.44.3991.PC	Solido / Solid	43.3	1.70	43.3	1.70	762	30				
UP-447-PC	12.44.3992.PC	Perforado / Slotted	43.3	1.70	43.3	1.70	762	30				
US-429-PC	12.44.3993.PC	Solido / Solid	43.3	1.70	22.6	0.88	914	36				
UP-429-PC	12.44.3994.PC	Perforado / Slotted	43.3	1.70	22.6	0.88	914	36				
US-449-PC	12.44.3995.PC	Solido / Solid	43.3	1.70	43.3	1.70	914	36				
UP-449-PC	12.44.3996.PC	Perforado / Slotted	43.3	1.70	43.3	1.70	914	36				

Especificaciones sujetas a cambio sin previo aviso. Specifications are subject to change without notice.

RAWELT®

Cotización/Quotation ☐ **Plazo de embarque• / Shipment exw•** ☐ **:**

Pedido No./Purchase order ☐ **:** _____ Our ref.: _____

Fecha/Date: _____ Vendedor/Salesman: _____ No. _____

Facturar a/Invoice to: _____ RFC. _____

Ordenado por/Ordered by: _____ Tel. ( ) _____ Fax ( ) _____

Dirección/Address: _____

_____ C.P./Zip. _____ Lugar/City/Country: _____

Consignar a/Ship to: _____


_____ Embarcar: Camión ☐ x Cobrar ☐ Pagado ☐ Paquete ☐

Cond. de Pago/Terms: _____

Cond. de Venta/Sale conditions: _____ L.P.: _____

9.7 - UNICANAL ACERO GALVANIZADO. SERIE US - UP - PC
CON RECUBRIMIENTO EXTERIOR DE **PVC**

9.7 - UNICHANNEL GALVANIZED STEEL. US-UP-PC SERIES.
PVC COATING

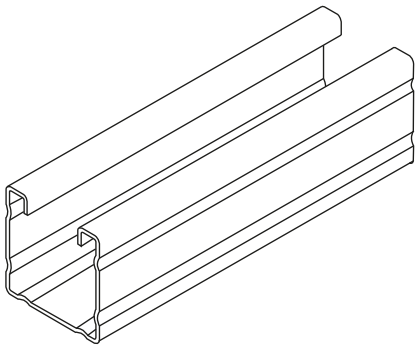Figura Figure	Código Code	Modelo Model	Unit. Ctn. Pzas. Pcs.	Std. Pkg. Pzas. Pcs.	Cantidad Qty.
	12.44.3973.PC	Solido / Solid			
	12.44.3974.PC	Perforado / Slotted			
	12.44.3975.PC	Solido / Solid			
	12.44.3976.PC	Perforado / Slotted			
	12.44.3977.PC	Solido / Solid			
	12.44.3978.PC	Perforado / Slotted			
	12.44.3979.PC	Solido / Solid			
	12.44.3980.PC	Perforado / Slotted			
	12.44.3981.PC	Solido / Solid			
	12.44.3982.PC	Perforado / Slotted			
	12.44.3983.PC	Solido / Solid			
	12.44.3984.PC	Perforado / Slotted			
	12.44.3985.PC	Solido / Solid			
	12.44.3986.PC	Perforado / Slotted			
	12.44.3987.PC	Solido / Solid			
	12.44.3988.PC	Perforado / Slotted			
	12.44.3989.PC	Solido / Solid			
	12.44.3990.PC	Perforado / Slotted			
	12.44.3991.PC	Solido / Solid			
	12.44.3992.PC	Perforado / Slotted			
	12.44.3993.PC	Solido / Solid			
	12.44.3994.PC	Perforado / Slotted			
	12.44.3995.PC	Solido / Solid			
	12.44.3996.PC	Perforado / Slotted			

• Antes de fincar el pedido en firme, favor de confirmar con fábrica el plazo de embarque definitivo.
• Before place your order, please confirm with RAWELT definitive date of shipment.

Producción ☐ **Almacén** ☐ **Embarques** ☐ **Control** ☐ **Expediente** ☐

Ing. de Ventas **Cliente**