DS-D4626CE22-1AS

DS-D4626CE22-1AS

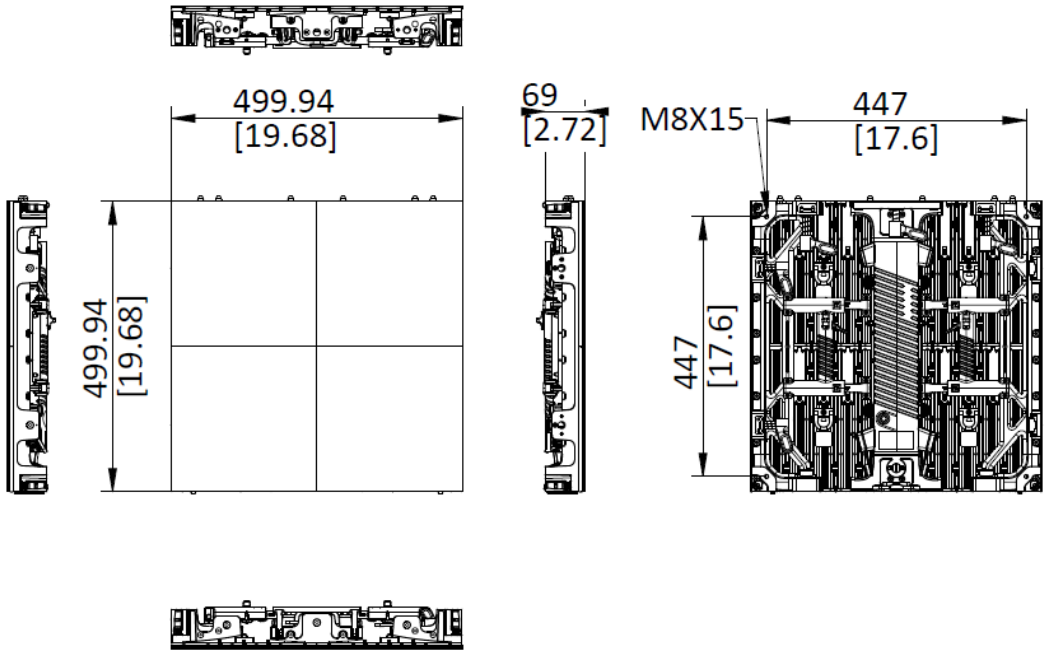


- Indoor P1.9/2.6/2.9 products can provide flexible version
- Can be connected vertically with the general panels of Aries & Aries Pro series indoor of 500*500mm
- 8 panels can be assembled into a cylinder (The minimum diameter of the cylinder is 1.27m)
- Faster installation & easier maintenance: Modular design with special eject button, all components can be quickly assembled, disassembled and maintained within 5 seconds

▪ Specification

Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P2.6
Pixel Pitch	2.6042 mm
Modules Component	2 × 2
Dimensions (W × H × D)	500mm × 500mm × 69mm
Resolution	192 × 192
Area	0.25 m²
Weight	7.4 kg
Pixel Density	147456 dots/m²
Lamp Board Housing	With housing
Cabinet Material	Die-casting Aluminium
Maintenance Method	Rear maintenance
Protection Level	IP40
Display	
White Balance Brightness	1000 cd/㎡
Color Temperature	6500K adjustable
Viewing Angle	Horizontal 160°, vertical 140°
Contrast Ratio	≥ 6000:1
Color Uniformity	≤ ± 0.004Cx, Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Driving Method	1/24
Frame Frequency	50/60 Hz
Refresh Rate	7680 Hz
Grey Level	14-bit
Key Material	
Lamp Encapsulation	SMD1515
Control System	Hikvision
Power	
Power Supply	110~220 VAC ± 15%
Max. Consumption	≤480 W/m² (1000nits)
Average Consumption	≤160 W/m²
Working Environment	
Working Temperature	-20 ℃ to + 45 ℃ (-4 ℉ to + 113 ℉)
Working Humidity	10% ~ 90%RH (No condensation)
Storage Humidity	10% ~ 90%RH (No condensation)
Storage Temperature	-40 ℃ to + 60 ℃ (-40 ℉ to + 140 ℉)
General	
Gross Weight	120.6 kg /10 in 1
Package Dimension (W × H × D)	1092(W) × 580(D) × 610(H) mm

▪ Dimension






Unit: mm [inch]

SCALE	1:1

▪ Accessory

▪ Optional

DS-D46XXCE22-1A S/P/A1	DS-D46XXCE22-1A S/P/A2	DS-DPRSS-1S/HBBS 05/CB	DS-D4626CE-1AS/ M
			

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®