LitDP-413A Fiber Distribution Box

Max. 16F splicing, 8F termination

LitDP-413A is a subscriber optical fiber access box that is used to build FTTH network. It is designed to provide a protected access point between the distribution cable and drop cable. Splitter is pre-installed in the box.



Features

- Beautiful and compact model, convenient installation
- Nontoxic material, non-corrosive metal components
- Compatible with different optical cables
- Neat fiber routing management


Application


- Outdoor application
- Wall, pole or wire mounting scenarios


Specifications

Item	Specification
Dimension (H × W × D)	227.5mm × 184mm × 61.5mm (±5mm)
Splice capacity	Max. 16F
Number of adapters	Max. 8 SC adapters
Configurable splitter	2 × 1:4 or 1 × 1:8 micro-type splitter
Distribution cable port	A pair of mid-span cables: Φ6-14mm; one branch cable: Φ6-14mm
Drop cable port	8 drop cables: 2×3mm


Product Details

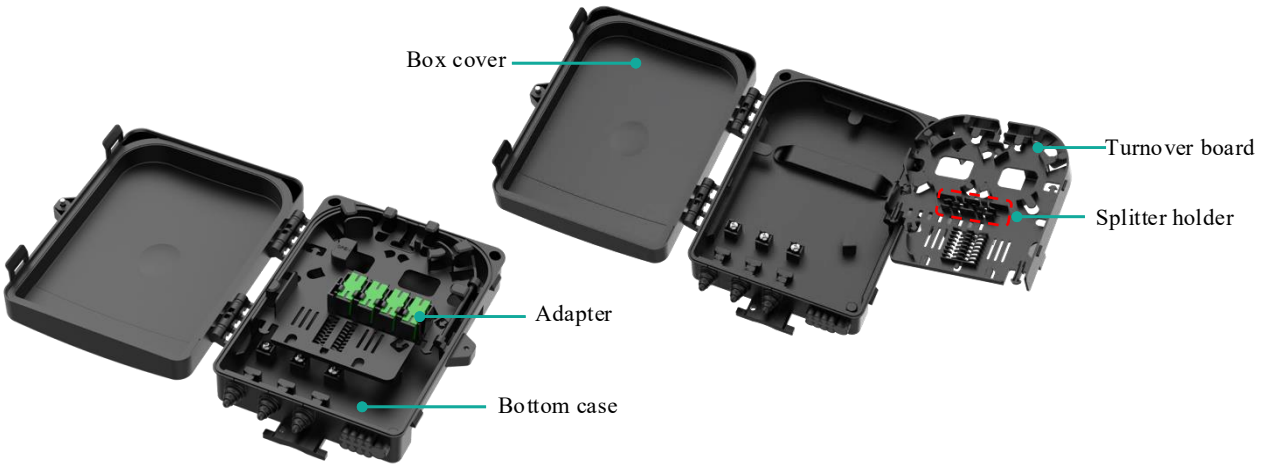

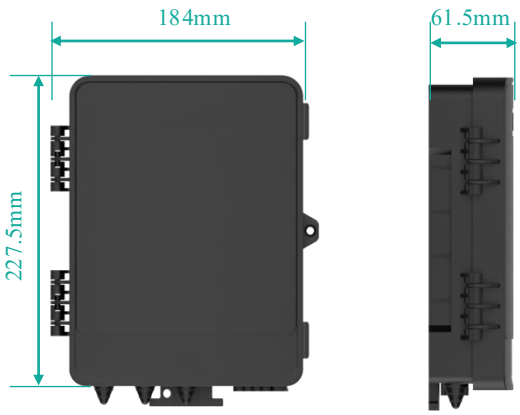

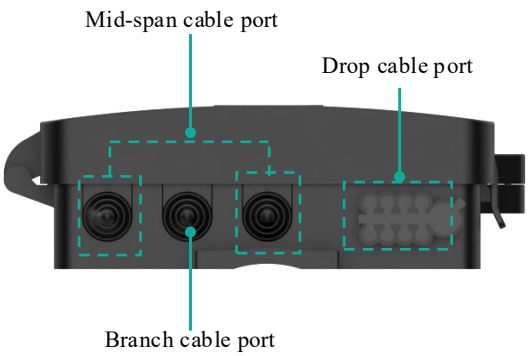

Fiber Route

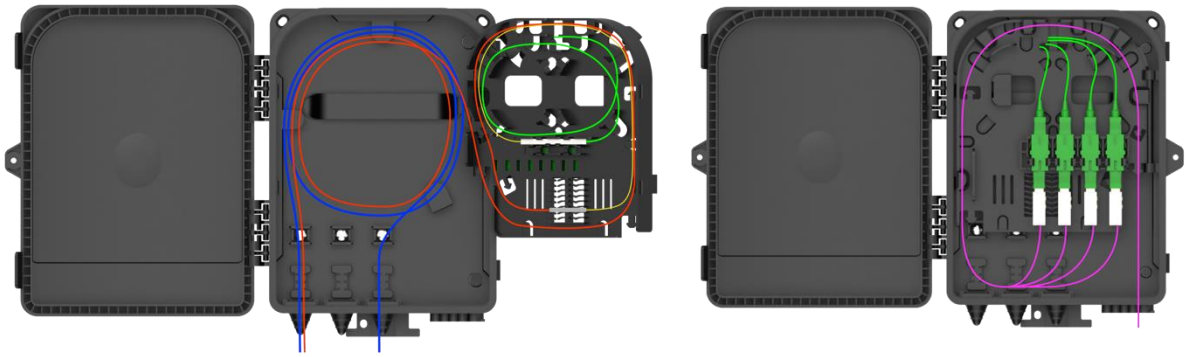

Mid-span cable (uncut)
Mid-span cable (stripped)
Drop cable with the field installable connector
Splitter input
Splitter output

Accessory List

Standard Accessories			
No.	**Name**	**Picture**	**Quantity**
1	Hose clamp		3 pcs
2	Fiber splice protective sleeve		9 pcs
3	Nylon cable tie		5 pcs
4	Drop cable clip		1 set (for 8 drop cables)
5	Bare fiber protective sleeve		0.5m
6	Resealable bag		1 pc
7	Wall mounting kit		1 set

Optional Accessories			
No.	Name	Picture	Quantity
1	Pole mounting kit		1 set
2	Wire mounting kit		1 set

Wire Mounting

